

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric






Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP+30%G.F UL94 V-0, 颜色: 黑色
Housing:LCP+30%G.F UL94 V-0,Color:Black
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
Contact: Brass/0.8u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL

2-特性 (characteristics):

额定电流: 0.75 AMP
Raring Current:0.75 AMP .
接触阻抗: 20mΩ MAX.
Contact Resistance:20mΩ MAX .
绝缘阻抗: 1000MΩMIN.
Insulating Resistance:1000MΩMIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40度至+105度
Temperature Range: -40°Cto +105°C

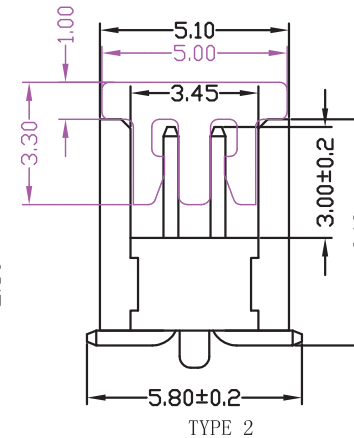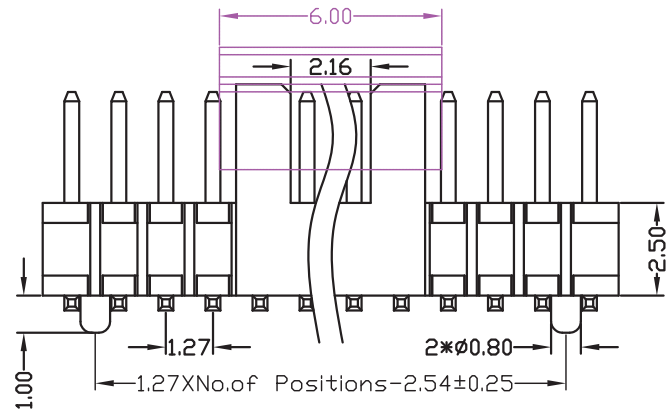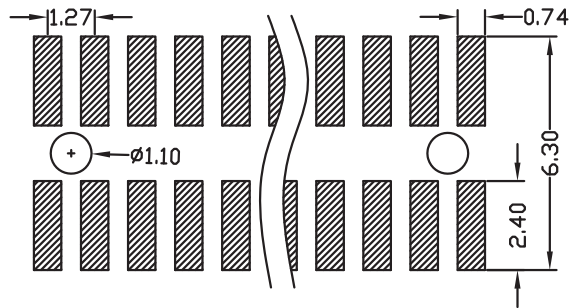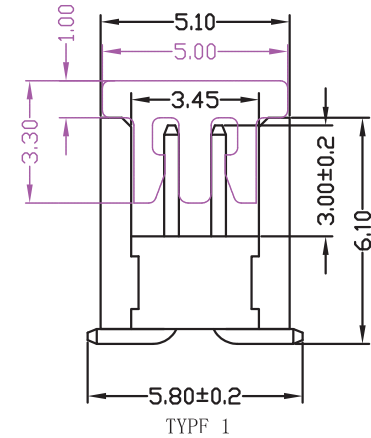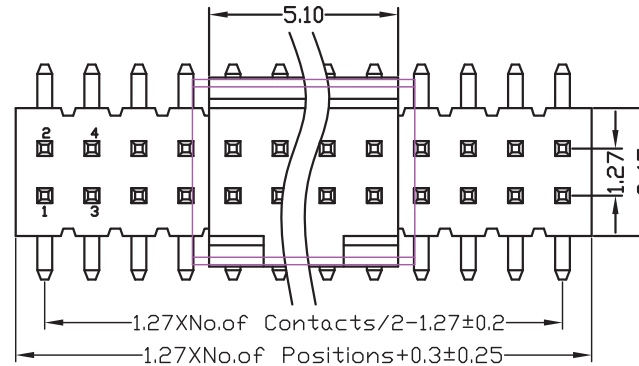

WORLDPO

深圳市沃德披欧精密器件有限公司
Shenzhen WorldPO Precision Devices Co., LTD

TITLE 1.27mm*5.6 SMT


DATE 2022-02-18

Tel:400 888 9602

Email:gu@worldpo.com

Web:www.worldpo.com

PROJECTON



REV A

UNIT mm

SCALE 1:1

PAGE 1/1

PART NO: WFTSH-XXXHXX X XX X

DRAWING NO: