

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN






耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE
X.XXX	± 0.05	01			DRAWN	DATE
X.XX	± 0.15	02			CHECKED	DATE
X.X	± 0.25	03			AUDITED	DATE
X	± 0.50	04			APPROVED	DATE

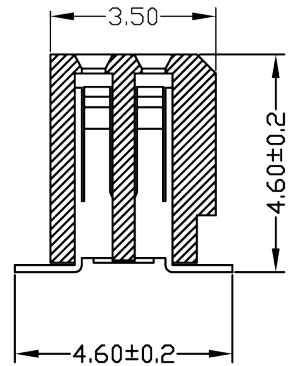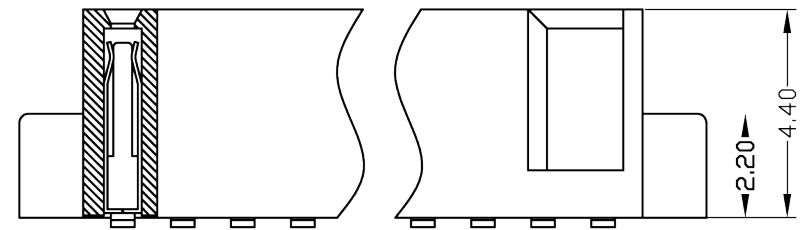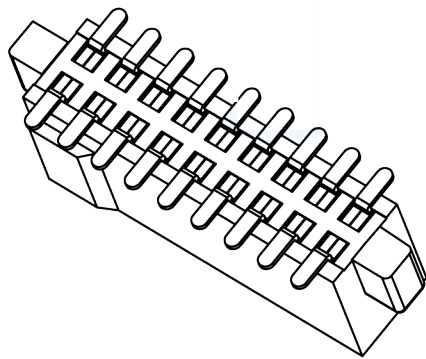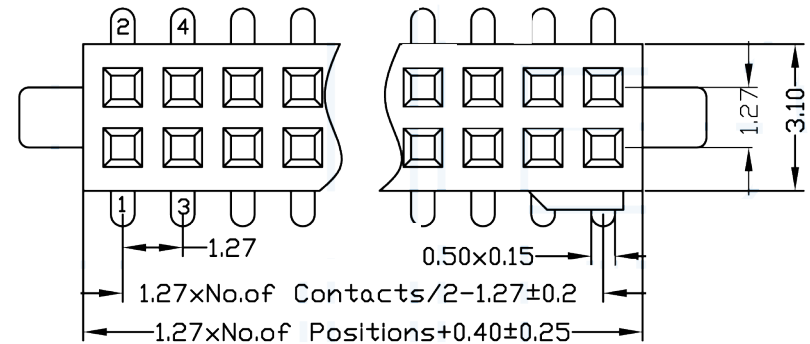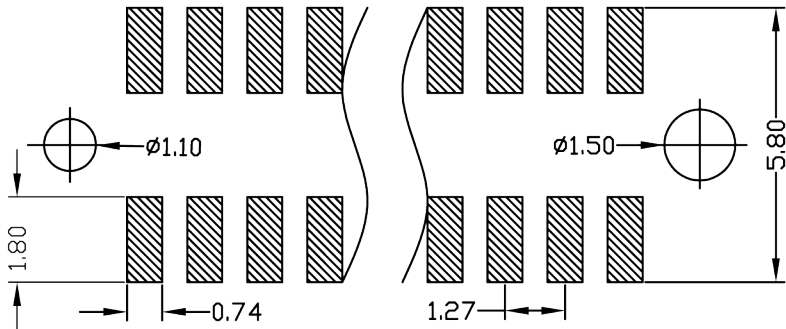

WORLDPO 深圳市沃德披欧精密器件有限公司
中国人自己的连接器!

TITLE: 1.27mm 双排母 塑高4.4 SMT U型 带外柱 带防块
DATE: 2012-06-18

PROJECTON: [Symbol] REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1

PART NO: WSFM-XX*XXXXX DRAWING NO: